




**PC2G16BU – OW2G16BU**

Ausführung / construction: 16 mm Stereo-Potentiometer  
 Welle / shaft:  $\varnothing$  4 oder 6 mm, L = 35 mm  
 Buchse / bushing: M7 x 0,75 / M10 x 0,75  
 Drehbereich / rotation angle: 270° eff. 232°  
 Lebensdauer / operation life: 20.000 Zyklen / cycles

Printausführung / for printed circuits (PC)  
 Drahtanschlussausführung / ordinary wiring (OW)  
 Conductive Plastic

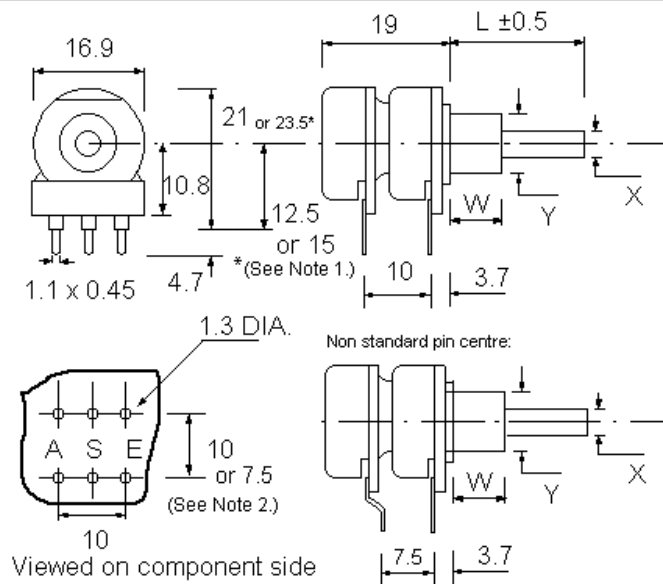

	4 mm Welle F22-PC			6 mm Welle F1-PC								
	lin.	poslog	neglog	lin.	poslog	neglog	lin.	poslog	neglog	lin.	poslog	neglog
100 R												
220 R												
470 R												
1 k												
2,2 k												
4,7 k												
10 k	9705*	9718										
22 k	9706*	9719										
47 k	9707*	9720										
100 k	9708*	9721										
220 k												
470 k												
1 M												
2,2 M												
4,7 M												

\* lagermäßige Ausführungen (unverbindlich) \\ \* in stock (non-binding)